


High-Pressure Rotating Pipe Cleaning Nozzles

RSP-R

Operation image

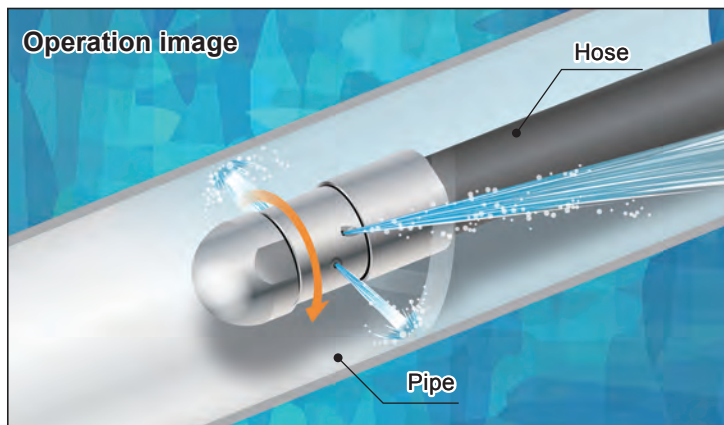

- Self-propelled in the pipe and rotating due to spray reaction force.
- Rotating solid stream jets with a high spray impact thoroughly clean the inner surface of a pipe.
- Compact design, made of special stainless steel with excellent wear resistance.

[STANDARD PRESSURE]

1.0 MPa

[APPLICATIONS]


Cleaning the inside of pipes, water and sewage drains, tubes of heat exchangers and cooling machines
Removing scale and rust

Structure	• Made of metal. • Includes a connecting adaptor, nozzle body, and cap.
Material	• HS (Hardened stainless steel)
Weight	• 40 g

Max. temperature: 150°C

Max. operating pressure: 10.0 MPa

DRAWING

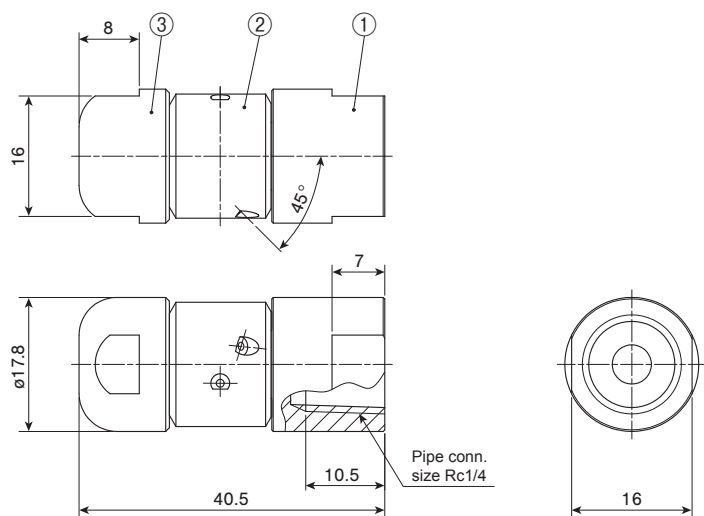


Unit: mm

①Connecting adaptor ②Nozzle body (rotating part) ③Cap (bearing)

[Note] Appearance and dimensions may differ slightly depending on material and nozzle code.

Spray capacity (L/min)			
1 MPa	2 MPa	5 MPa	10 MPa
5.8	8.2	13.0	18.3

FLOW-RATE DIAGRAM

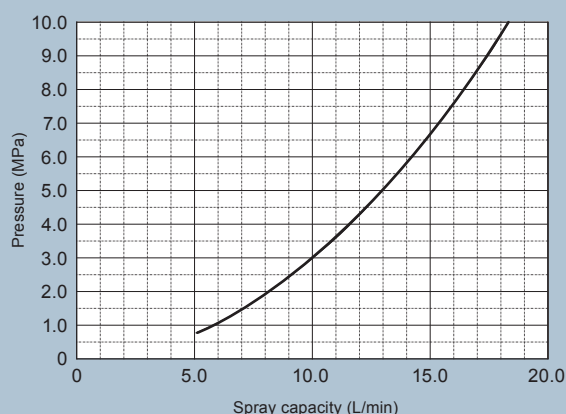

HOW TO ORDER

Please inquire or order using this product code.

1/4F RSP 58R HS

Pipe conn.
size*

Spray capacity
code

Material

*"F" indicates female thread ("Rc" of the ISO standard), e.g. 1/4F = Rc1/4.