

- Nozzle for low pressure flat blow pattern.
- Made of ABS and aluminium A5052 to achieve a light weight and high strength.
- Able to reduce the energy cost to one-third compared to the consumption of compressed air nozzles.
- Unique design that provides a higher flow rate compared to the flow rate supplied.
- The TF-BF model achieves very low noise levels.



Material ABS	Pressure 0.1 MPa (ca. 1 bar)	Maximum temperature 80 °C
Thread connection 1/2" male	Weight 26 g	Strength of blowing* 0.6 N
Air consumption* 724 l/min, Normal	Level of noise* 86 dB(A)	*Calculated at standard pressure 0.05 MPa (ca. 0.5 bar).
Product code 1/2MTFBF428030ABS		


Material A5052	Pressure 0.1 MPa (ca. 1 bar)	Maximum temperature 150 °C
Thread connection 1/2" male	Weight 65 g	Strength of blowing* 0.6 N
Air consumption* 724 l/min, Normal	Level of noise* 86 dB(A)	*Calculated at standard pressure 0.05 MPa (ca. 0.5 bar).
Product code 1/2MTFBF428030A5052		

Blowing pattern

Flat blowing




Dimensions (mm)

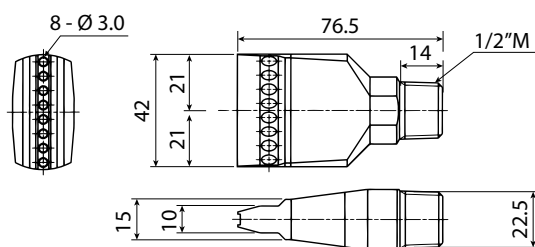

Adhesive is used for the assembly of some parts.

Air

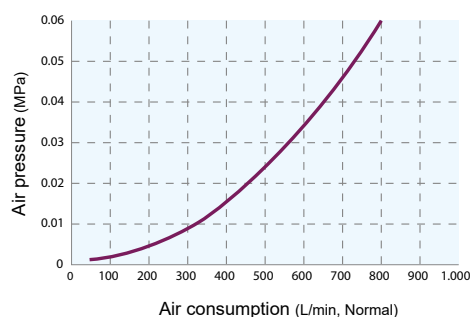

Blowing power

