


360° Rotatable Universal Joints

WUT



WUT Universal Joint with spray nozzle




- Able to rotate 360° to adjust the spray direction. Desired position can be locked in place with bolt.
- Stabilizing function suppresses internal turbulences.
- Withstands pressures of up to 3.0 MPa.
- Safe design prevents parts from falling off when the lock is released.
- R1/4 threaded nozzle is attachable.

Material	• Adaptor: SCS13 • Bolt: S303 • E-ring: S304 equivalent • O-ring: NBR
Weight	• 146 g

DRAWING

Unit: mm

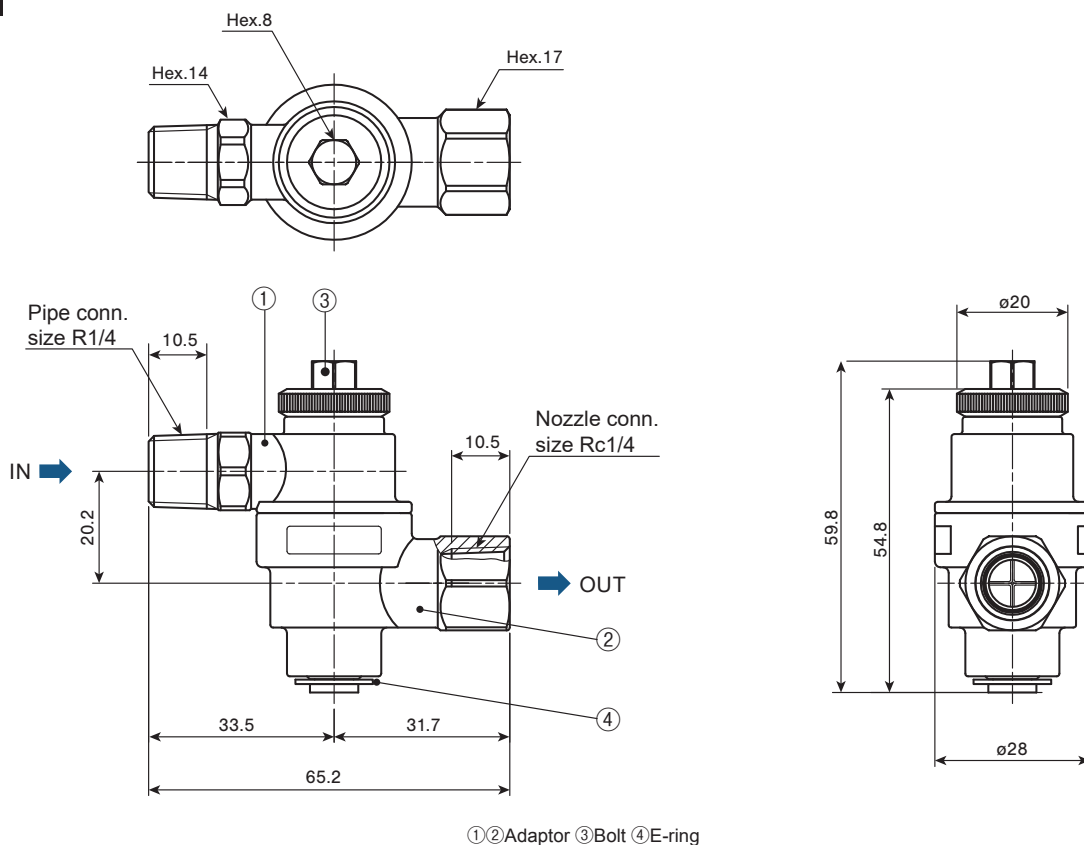

Cautions for use

- Hand tightened bolts may loosen if there is a lot of vibration. Tighten with a torque-wrench to 6 N-m.
- Max. operating pressure: 3.0 MPa
- Max. temperature: 90°C
- When used with a solid stream jet nozzle, slightly turbulent flow occurs.

HOW TO ORDER

Please inquire or order using this product code.

WUT 1/4M × 1/4F SCS13

Pipe connection size*

Nozzle connection size*

Material

*"M" indicates male thread ("R" of the ISO standard) and "F" indicates female thread ("Rc" of the ISO standard), e.g. 1/4M = R1/4, 1/4F = Rc1/4.