Self-cleaning Solid Stream Jet

MOMOJet "C"











- High impact solid stream.
- When the liquid pressure is reduced to 0.03 MPa or lower, the nozzle tip retracts and purges any foreign particles that clog the nozzle. By increasing the water pressure to 0.2 MPa or higher, normal spraying resumes.
- The straight-through orifice makes this nozzle suitable for multi-nozzle set-up.

[STANDARD PRESSURE]

1.0 MPa

[APPLICATIONS]


Cleaning: Paper making (wire, felt parts and rollers) steel plates, PCB

Cooling: Steel plates

Foam breaking: Waste water treatment Others: Applications where recirculated water is being used

| Structure | By changing the liquid pressure, a built-in spring moves the split nozzle tip up and down and opens the orifice for purging. |
|-----------|--|
| Material | • S303 |
| Weight | • 52g |

[Note] Appearance and dimensions may differ slightly depending on material and nozzle code.

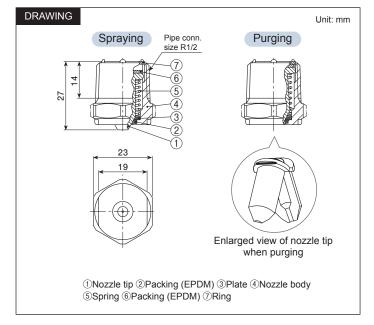

| Spray capacity code | Spray capacity (L/min) | | | | | Free passage diameter (mm) | |
|---------------------------|------------------------|------------|------------|----------|----------|----------------------------|---------|
| | 0.3 MPa | 0.5 MPa | 0.7 MPa | 1 MPa | 2 MPa | Spraying | Purging |
| 10 | 0.55 | 0.71 | 0.84 | 1.00 | 1.41 | 0.7 | 1.8 |
| 16 | 0.88 | 1.13 | 1.34 | 1.60 | 2.26 | 0.9 | 1.9 |
| 23 | 1.26 | 1.63 | 1.93 | 2.30 | 3.25 | 1.1 | 2.0 |
| 32 | 1.75 | 2.26 | 2.68 | 3.20 | 4.53 | 1.2 | 2.0 |
| 47 | 2.58 | 3.32 | 3.93 | 4.70 | 6.65 | 1.5 | 2.2 |
| 65 | 3.56 | 4.60 | 5.44 | 6.50 | 9.19 | 1.8 | 2.4 |

Attention:

- 1. To start spraying, a flow rate of about 9 L/min at 0.02–0.03 MPa is required for all models. Make sure to select an appropriate pump.
- 2. MOMOJet is designed to start spraying when the pressure is greater than 0.1 MPa. Use MOMOJet at a pressure of 0.2 MPa or higher.
- 3. Since MOMOJet series nozzles have moving nozzle tips, the spray capacity is only guaranteed within +/-10% at standard pressure.

