
Narrow-angle Full Cone Spray Nozzles









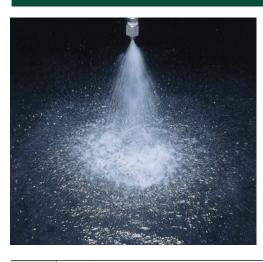

[Spray pattern]



[Spray distribution]

- Narrow-angle full cone spray pattern with a round impact area and uniform distribution.
- Unique design produces fine atomization without a whirler.
- No-whirler design with a large free passage diameter minimizes clogging.

[STANDARD PRESSURE]

0.3 MPa


[APPLICATIONS]

Cleaning: Pipes, bottles, containers, filters Cooling: Steel plates

Structure	 One-piece structure with a press-fitted orifice tip. No obstructions in the nozzle interior.
Material	• S303 SPECIAL ORDER MATERIAL: S316

Pipe conn.		\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\				
size	L	Н	øD	N	Weight (g)	
R1/4	24	14	13.5	10.5	19.5	
R3/8	32	19	18	11	48	

[Note] Appearance and dimensions may differ slightly depending on material and nozzle code.

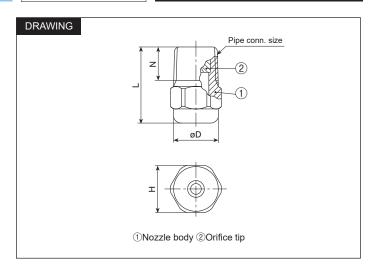

Spray angle code	Spray capacity code	Pipe conn.size		Spray angle (°)		Spray capacity (L/min)				Mean droplet	Free passage			
		R1/4	R3/8	0.15 MPa	0.3 MPa	0.7 MPa	0.15 MPa	0.2 MPa	0.3 MPa	0.5 MPa	0.7 MPa	1 MPa	diameter (µm)	diameter (mm)
30	06 08 14	00		26 26 26	30 30 30	32 32 32	4.80 6.40 11.2	5.26 7.02 12.3	6.00 8.00 14.0	7.42 9.90 17.3	8.54 11.4 19.9	9.91 13.2 23.1	750 {	2.3 2.7 3.8
	20		Ö	26	30	32	16.0	17.5	20.0	24.7	28.5	33.0	970	4.4
15	06 08	00		12 12	15 15	16 16	4.80 6.40	5.26 7.02	6.00 8.00	7.42 9.90	8.54 11.4	9.91 13.2	925	2.3 2.7
	14 20		00	12 12	15 15	16 16	11.2 16.0	12.3 17.5	14.0 20.0	17.3 24.7	19.9 28.5	23.1 33.0	1,200	3.8 4.4

[Note] Please use NJJP series nozzles with water pressures of 0.15 MPa or higher for a stable spray pattern.

