

Universal Ball Joints

UT

Accessories



Metal UT with spray nozzle



Plastic UT with spray nozzle

- Allows for precise alignment and adjustment of the nozzle and spray direction after installation within a range of 50°.

Metal Ball Joints

- Accurate nozzle alignment is possible after connecting to a pipe.
- Available in variety of pipe connection sizes from 1/8" to 3/4".
- Stainless steel UT Ball Joints are designed to withstand pressures up to 15 MPa.


Plastic Ball Joints

- Spray direction is adjustable while spraying at a pressure up to 0.3 MPa.
- Easy installation, no tools required. No O-ring.
- Cost saving, injection-mold construction.
- Lightweight, weighing less than half of the metal ball joint.

UT SERIES (metal)

Material	• S303
	SPECIAL ORDER MATERIAL: S316 or others

DRAWING

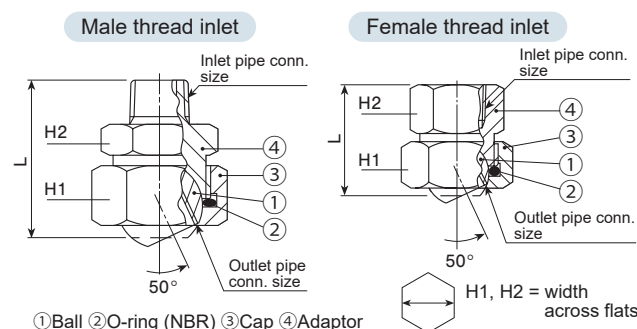

Ball joint code (Inlet x Outlet)	Inlet pipe conn. size	Outlet pipe conn. size	Dimensions (mm)			Weight (g)
			L	H1	H2	
UT 1/8M × 1/8F	R1/8	Rc1/8	32.5	22	21	56
UT 1/4M × 1/8F	R1/4	Rc1/8	36.0	22	21	60
UT 1/4M × 1/4F	R1/4	Rc1/4	39.5	29	24	100
UT 3/8M × 1/4F	R3/8	Rc1/4	40.0	29	24	110
UT 3/8M × 3/8F	R3/8	Rc3/8	47.5	35	30	190
UT 1/2M × 1/2F	R1/2	Rc1/2	54.5	41	41	325
UT 3/4M × 3/4F	R3/4	Rc3/4	61.5	50	46	490
UT 1/8F × 1/8F	Rc1/8	Rc1/8	28.5	22	21	63
UT 1/4F × 1/8F	Rc1/4	Rc1/8	28.5	22	21	58
UT 1/4F × 1/4F	Rc1/4	Rc1/4	33.5	29	24	110
UT 3/8F × 1/4F	Rc3/8	Rc1/4	33.5	29	24	100
UT 3/8F × 3/8F	Rc3/8	Rc3/8	44.5	35	30	220
UT 1/2F × 1/2F	Rc1/2	Rc1/2	48.5	41	41	375
UT 3/4F × 3/4F	Rc3/4	Rc3/4	55.5	50	46	560

HOW TO ORDER

To inquire about or order a specific metal ball joint please refer to this coding system.

Example: UT 1/8M × 1/8F S303


UT	1/8M	×	1/8F	S303
	Inlet pipe connection size*		Outlet pipe connection size*	Material
	1/8M 1/8F 1/4M 1/4F 3/8M 3/8F 1/2M 1/2F 3/4M 3/4F		1/8F 1/4F 3/8F 1/2F 3/4F	S303

***"M" indicates male thread ("R" of the ISO standard) and "F" indicates female thread ("Rc" of the ISO standard), e.g. 1/8M = R1/8, 1/8F = Rc1/8.

UT SERIES (plastic)

Material	• Adaptor and Cap: FRPP • Ball: FRPP + PP + EPDM
----------	---

DRAWING

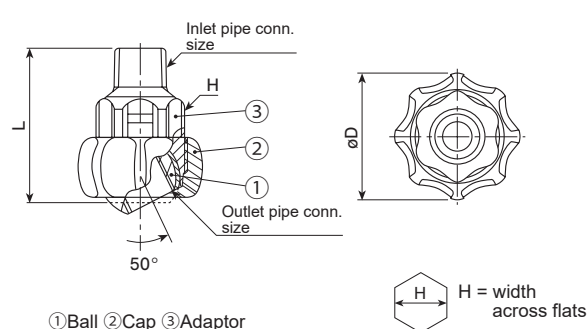

Ball joint code (Inlet x Outlet)	Inlet pipe conn. size	Outlet pipe conn. size	Dimensions (mm)			Weight (g)
			L	H	øD	
UT 1/8M × 1/8F	R1/8	Rc1/8	38.0	21	32	12
UT 1/4M × 1/8F	R1/4	Rc1/8	40.0	21	32	13
UT 1/4M × 1/4F	R1/4	Rc1/4	40.0	21	32	12
UT 3/8M × 1/8F	R3/8	Rc1/8	41.0	21	32	13
UT 3/8M × 1/4F	R3/8	Rc1/4	41.0	21	32	12

HOW TO ORDER

To inquire about or order a specific plastic ball joint please refer to this coding system.

Example: UT 1/8M × 1/8F FRPP-IN

UT	1/8M	×	1/8F	FRPP-IN
	Inlet pipe connection size*		Outlet pipe connection size*	Material
	1/8M 1/4M 3/8M		1/8F 1/4F	

***"M" indicates male thread ("R" of the ISO standard) and "F" indicates female thread ("Rc" of the ISO standard), e.g. 1/8M = R1/8, 1/8F = Rc1/8.



Cautions

Metal UT Use UT-S303 only at pressures **below 15 MPa**.

Plastic UT Use UT-FRPP only at pressures **below 1 MPa** (at room temperature).

Do not use UT ball joint adaptors if sudden changes in water pressure can occur.

When using KB and KKB series nozzles, a different type of UT Ball Joints are required. Please contact us for more details.